




# CONOVA DATA CENTER HALLEIN

DATA CENTER 6 + 7 – CERTIFIED TO ISO 27001 AND EN 50600  
 AVAILABILITYZONE VZ-DC6 | REGION SALZBURG SOUTH

As a data center operator with its own data centers in Austria, conova offers state-of-the-art infrastructure at the highest levels of supply and security. data center in Hallein has two data centers in one building. These data centers are designed as stand-alone, autonomous units, powered by separate substations and a medium-voltage redundant power system. They are also equipped with a redundant UPS system and emergency backup power system.

## ” Highlights at a glance

- certified according to ISO 27001
- certified according to EN 50600 – class 3 availability (“high”) or 4 (“very high”), class 1-4 protection, G3 energy efficiency
- full video surveillance
- 2-factor authentication with separation system
- Geo-redundancy between locations in Salzburg-Maxglan and Hallein
- Electrical availability: 99.98 % and Internet upstream: 99.9 %
- Early fire detection with automatic gas extinguishing system

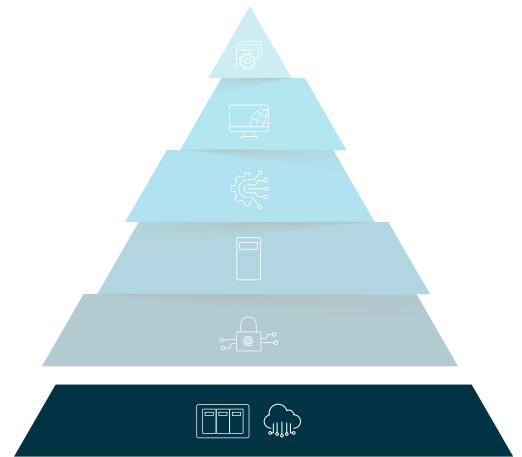

### Location

- Avoidance of external sources of danger
- Business park with good transport connections
- Rapid and 24/7 unlimited access, 365 days a year
- High electrical availability
- High energy-efficiency and green IT
- Video surveillance inside and outside



### Data Center Location

- Data center room with ceiling height of 3.40 meters
- Cable runners located above the rack rows at a height of 2.70 meters
- Anti static pressured double floor
- 1000 kg load capacity per m<sup>2</sup>
- Minimum width of 1.2 meters and 1000 kg load capacity per m<sup>2</sup>
- Biometrically secured access to the entire secured area
- Data center areas in separate fire compartments
- Cold aisle containment



### Carrier Connection

- Carrier neutral transfer point for telecom providers
- 24x7 accessibility for telecom providers
- Path redundant cable runners



Numerous scaling options can be found in our current price list.



## Access

24/7 access

2-step authentication

Electronic key card

Biometric access system

## Rack

Dimensions 1 Rack 750 mm x 1200 mm x 2250 mm (WxDxH) correspond to 48 rack units

Racks closed laterally

Individually, electronically lockable doors on the front and rear

Minimum of 80 cm access space to both sides

## Fire Protection

Class REI 90/EI2 90-C fire protection for data center and technical area

Early fire detection system in the ceiling and double floor

Automatic fire extinguishing with nitrogen

## Cooling

Redundant cooling

Guaranteed ambient temperature between 18° C and 26° C  
at a relative humidity of 35 % - 65 %

Automatic leakage detection in the data center and operational areas

Cooling by down-flow systems

## Operation

Provider independent

Internet upstream availability of 99,9 %

Variable billing of the operating costs

Flat-rate of operating costs upon request

Various cabling options between the racks, data center and telecom sector in copper and fiber optic

Monitoring of climate control, power, fire alarm and backbone 24/7

## Energy Supply

Continuous TN-S principle

Own 30 KV transformer station and medium voltage switchgear

Battery-backed, uninterruptible power supply with a backup time of 10 minutes

230 V/400 V AC voltage at 50 Hz

Power system using diesel generator with at least 24 hours autonomy

Flexible power connection options

Electrical availability of 99,98 %, 24/7

